




The Solution to Ordinary

No.	Qty.	Parts in Set	Dimensions	Material
1	A - B 1 each	Hinge A		Steel, Plastic (POM) Finish: White, Matte Black
		Hinge B		


No.	Qty.	Parts in Set	Dimensions	Material
2	4 pcs	Washer cover (hanging side)		Plastic (ABS)
		Washer cover (leading edge)		
4	2 pcs	Rod cover		Plastic (POM)

No.	Qty.	Parts in Set	Dimensions	Material
5	1	Connecting Rod		Aluminium Alloy Finish: Anodised: Black/silver
				Aluminium Alloy Finish: Anodised: Black/silver

Detailed Drawing

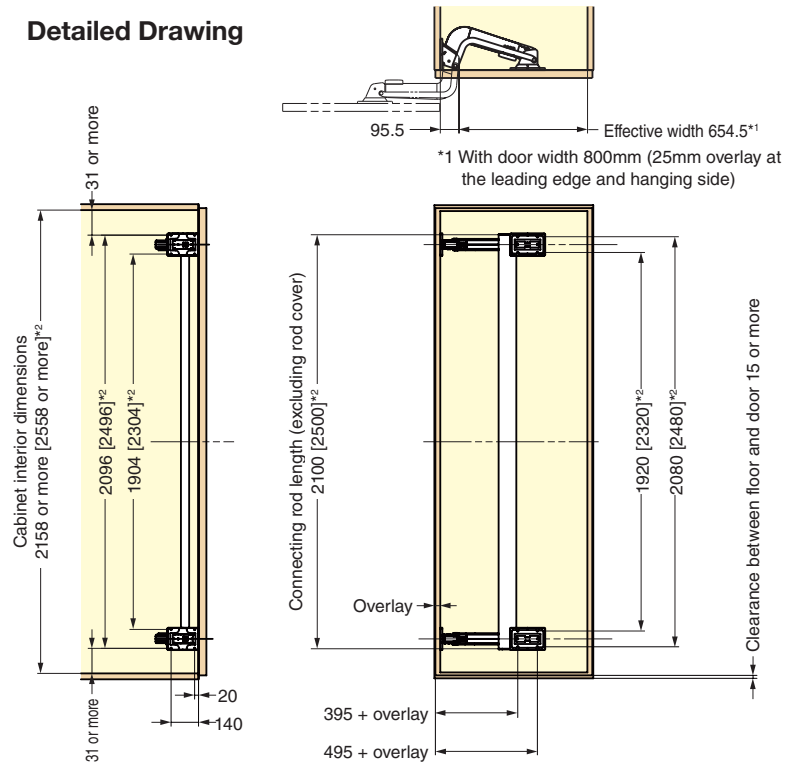

Range of Motion

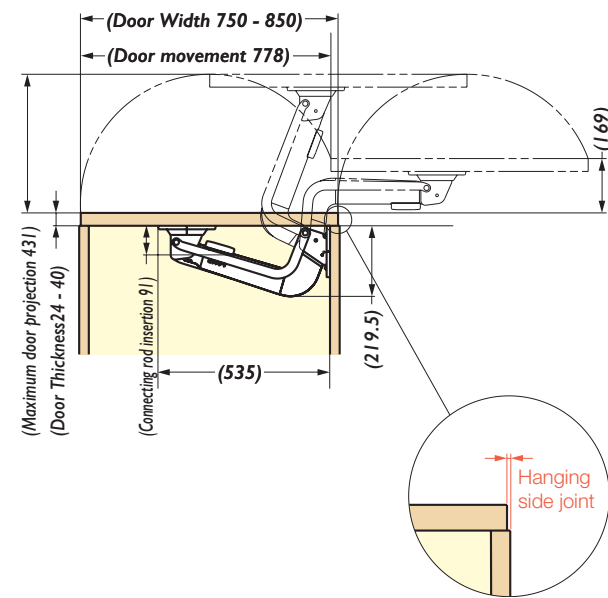

^{*2} The dimensions in [] indicate LIN-X800H specifications.

^{*2} For cabinet interior dimensions smaller than the minimum value, reduce the other dimensions marked with ^{*2} by an equivalent amount. The connecting rod must be cut by the customer.

1 IT-1 LINX800-2021



Sugatsune America
18101 Savarona Way
Carson, CA 90746
www.sugatsune.com



Share or watch
this video
featuring our
LIN-X800 Lateral
Opening Door
System in action





Where Innovation Meets Beauty

Introducing the newest edition to our LIN-X Lateral Opening Door System Series, its the LIN-X800, Ideal for closet entryways, large pantry doors, storage units, hidden rooms and much more.



LIN-X800


- Lateral Opening Mechanism: Allows doors to swing out laterally in a small radius, ideal for tight front space application.
- 4-Way Adjustable: Vertical, horizontal, depth and parallel adjustment.
- Smooth Movement: Built-in dampers provide a smooth soft-closing movement.
- Use in various applications: Ideal for closet entryways, large pantry doors, storage, hidden rooms, etc. Can be used on L shaped corner spaces.
- Hardware is non-handed: can be used for left- or right-opening doors.
- Designed for overlay installation, but can be installed flush with the surrounding surfaces. Please contact customer service for details on inset installations.




America Headquarters
18101 Savarona Way
Carson, CA 90746
www.sugatsune.com



Installation Examples

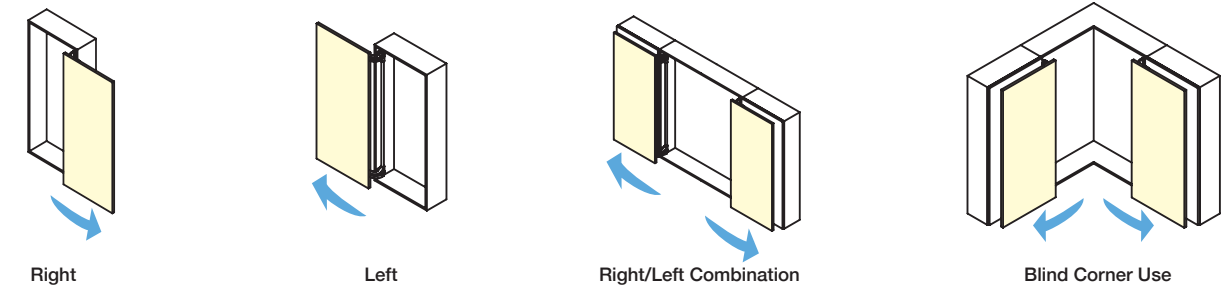


Minimize opening clearance required with LIN-X800, compared to traditional swinging doors. When closed, the LIN-X door can be flush with the surrounding walls.

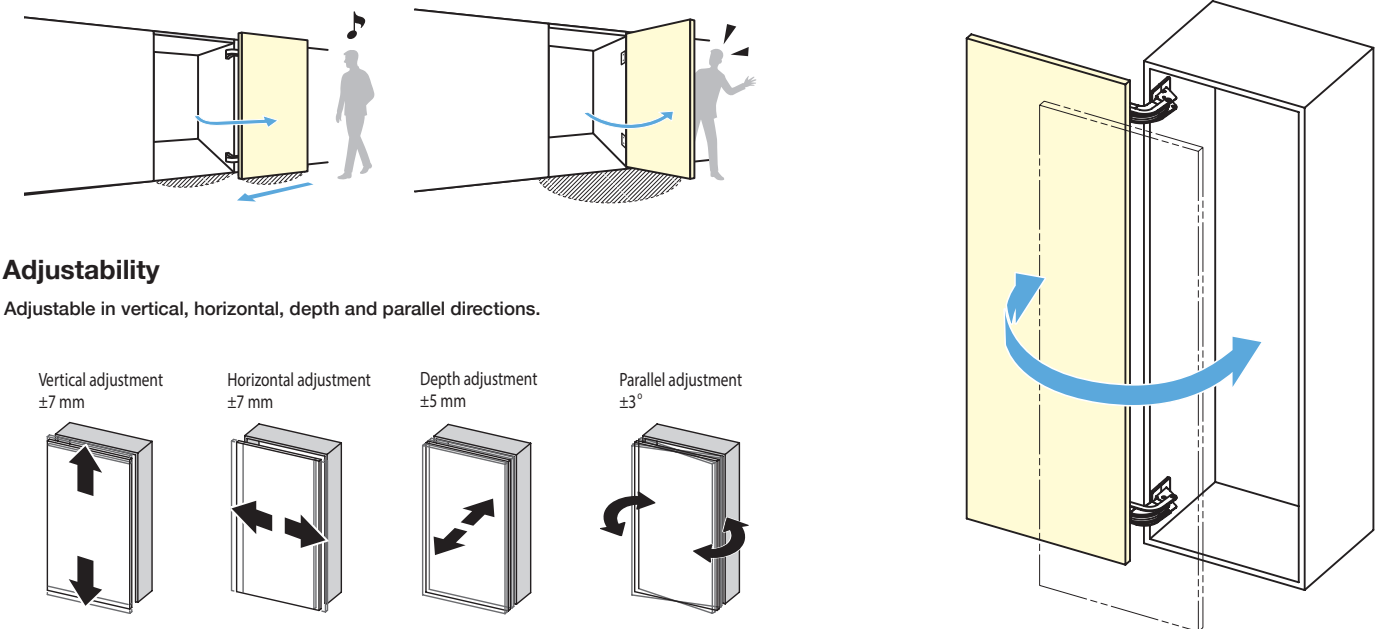

Adjustability

Adjustable in vertical, horizontal, depth and parallel directions.

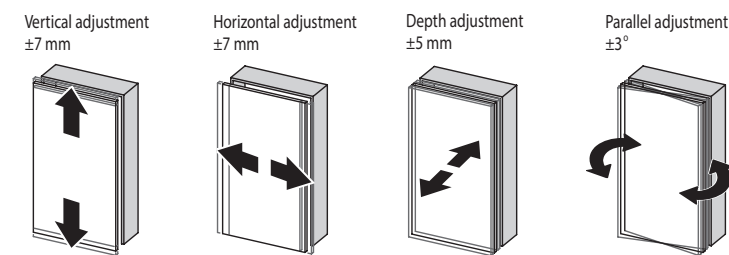

	LIN-X800	LIN-X800H
Door Width	750~850mm (29-1/2"~33-7/16")	
Max. Door Height	2400mm (94-1/2")	
Door Thickness	24~40mm (15/16"~1-9/16")	
Max. Door Weight	40kg/door (88lbs/door)	

Item No.	Material	Weight (kg)	Finish
LIN-X800-WT-S	Steel, Aluminum	18kg (40lbs)	White
LIN-X800-BL-S			Black
LIN-X800H-WT-S		18.7kg (44lbs)	White
LIN-X800H-BL-S			Black

