



CONCEALED HINGE (19mm OVERLAY)



230-26/19T, C26/19T

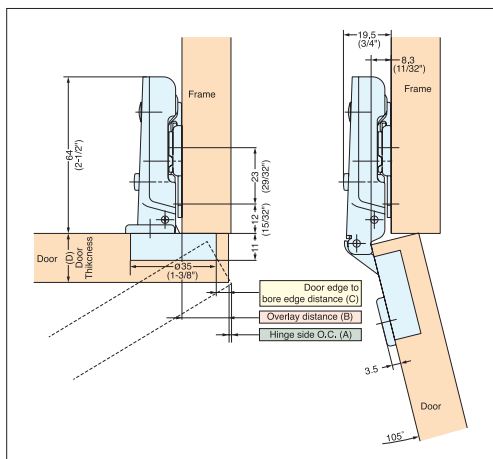

Bore Dimensions

■ Door edge to bore edge distance (C) and Overlay distance (B) Table 1.

Door edge to bore edge distance (C)	3	4	5
Overlay distance (B)	17	18	19

■ Hinge side opening clearance chart Table 2.

Door thickness (D)	Door edge to bore edge distance (C)		
	3	4	5
15	1.0	0.9	0.9
16	1.2	1.2	1.1
17	1.5	1.5	1.4
18	1.8	1.8	1.7
19	2.2	2.1	2.0
20	2.6	2.5	2.4
21	3.0	2.9	2.8
22	3.4	3.3	3.2
Hinge side O.C. (A)			

*Mounting Plate sold separately. See P.299

*Mounting Screw sold separately. See TAP3515NI on P.299



Item No.	Type	Weight (g)	Carton (pcs)
230-26/19T	Free Swinging	60	200
230-C26/19T	Self-Closing		

Material	Finish
Steel	Nickel

CONCEALED HINGE (9mm OVERLAY)



230-26/9T, C26/9T

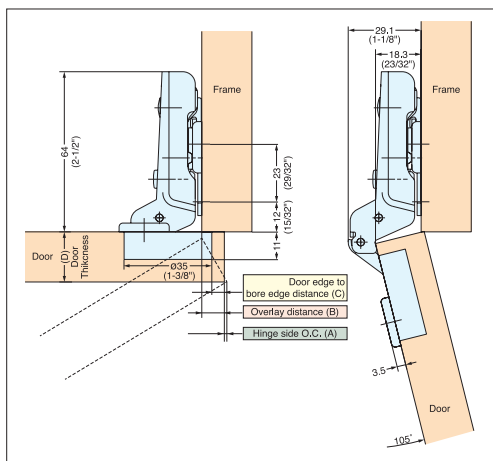

Bore Dimensions

■ Door edge to bore edge distance (C) and Overlay distance (B) Table 1.

Door edge to bore edge distance (C)	3	4	5
Overlay distance (B)	7	8	9

■ Hinge side opening clearance chart Table 2.

Door thickness (D)	Door edge to bore edge distance (C)		
	3	4	5
15	1.0	0.9	0.9
16	1.2	1.2	1.1
17	1.5	1.5	1.4
18	1.8	1.8	1.7
19	2.2	2.1	2.0
20	2.6	2.5	2.4
21	3.0	2.9	2.8
22	3.4	3.3	3.2
Hinge side O.C. (A)			

*Mounting Plate sold separately. See P.299

*Mounting Screw sold separately. See TAP3515NI on P.299

Item No.	Type	Weight (g)	Carton (pcs)
230-26/9T	Free Swinging	60	200
230-C26/9T	Self-Closing		

Material	Finish
Steel	Nickel